

(R) METALLIC SHOT AND GRIT MECHANICAL TESTING

Foreword—This Document has not changed other than to put it into the new SAE Technical Standards Board Format.

Shot testing machines differ in detail, but are alike in the fundamental principle that a sample of shot is subjected to repeated impacts on a target. The percentage of breakdown is readily determined by means of a screen analysis. These data can be used to check the uniformity of shipments or to determine the relative fatigue life. The results obtained from testing machines are not intended to be used in establishing consumption or cost in production machines because of other considerations not duplicated in the laboratory. However, the machines can be used to test incoming shot for consistency and comparative life with previous shipments of the same type of shot from the same manufacturer under laboratory conditions. Some machines can be fitted with standard test strips¹ to measure energy transfer.

NOTE—Shot particles may be subject to multiple impacts in a test machine. The target material of test machines are made of hard steel to resist wear during testing. Hard shot is more elastic than soft shot. Due to these considerations and their influence on shot failure, care must be exercised when analyzing results from this accelerated, laboratory testing.

1. **Scope**—This SAE Information Report is intended to provide users and producers of metallic shot and grit² with general information on methods of mechanically testing metal shot in the laboratory.

2. **References**

2.1 **Applicable Publications**—The following publications form a part of this specification to the extent specified herein. Unless otherwise specified, the latest issue of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J442—Test Strip, Holder, and Gage for Shot Peening

SAE J443—Procedures for Using Standard Shot Peening Test Strip

2.1.2 ASTM PUBLICATION—Available from ASTM, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM B 215—Methods of Sampling Finished Lots of Metal Powders

1. See SAE J442 and SAE J443.

2. Shot and grit will be hereafter referred to as shot.

SAE J445 Revised APR96

3. **Sampling**—Samples for testing shall be representative of each shipment or production lot. The method of sampling shall be ASTM B 215, Method B.

4. **Calibration**—Because results can be influenced by the condition of a test machine, the machine must be recalibrated according to the machine manufacturer's recommendation. This may be accomplished by reserving an adequate amount of shot of known life, and comparing the results obtained on tests with that of the "standard shot." The machine must be repaired or adjusted as necessary when off-standard conditions are observed.

5. **Examples of Test Procedures**

5.1 **Average Life by Measurement of the Area Under the Breakdown Curve**—If a representative sample of shot is observed as it is broken down in a testing machine, and the percent of the sample retained on a control sieve is plotted against the number of cycles, on rectangular coordinate paper, a breakdown curve typical of the shot is obtained. The control sieve aperture should be approximately equal to the removal size in the blast operation. The area under this curve is a measure of the average number of cycles required to reduce the size of the shot particles which pass through the control sieve. This average number of cycles, commonly referred to as the average life of the shot, is a complete evaluation of the life of the shot under the conditions of the test.

5.1.1 EXAMPLE PROCEDURE

- a. Place 50 to 100 g of the sample to be tested into the test machine.
- b. Run until about 20% passes through the control sieve.
- c. Screen, weigh, and plot the percent retained on the control sieve against the number of cycles, using rectangular coordinate paper.
- d. Return the sample retained on the control sieve to the machine and continue running.
- e. Repeat steps (c) and (d) at intervals dictated by the rapidity of breakdown of the sample, until less than 5% of the sample is retained on the control sieve.
- f. Draw the breakdown curve, extrapolating to 0% at the end of the next test interval. The breakdown curve, using the data from the following example, with trapezoids inscribed, is shown in Figure 1.
- g. Measure the area under the breakdown curve. For example, use a planimeter or sum the areas of the individual trapezoids inscribed under the breakdown curve. Record the value as average life, in cycles.

5.1.1.1 Example

- a. Initial Charge—100 g of S660
- b. Control Sieve Opening—600 μm
- c. Test Intervals—500 cycles

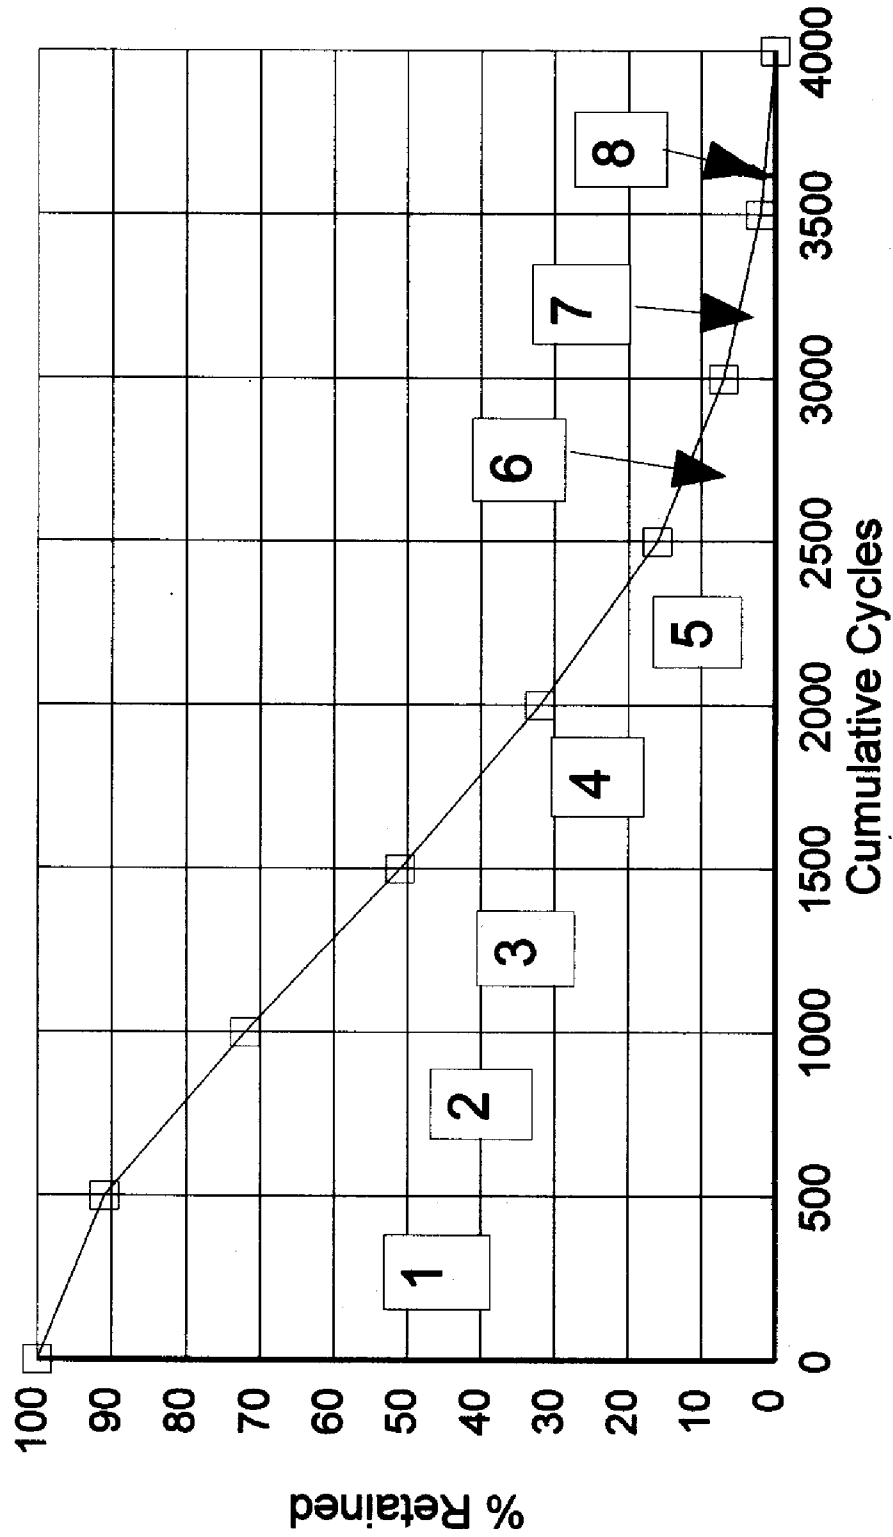


FIGURE 1—BREAKDOWN CURVE S660 SHOT TRAPEZOIDS INSCRIBED AND NUMBERED

5.1.1.2 Breakdown Data—(See Table 1.)

TABLE 1—BREAKDOWN DATA FOR EXAMPLE

Cumulative Cycles	% Retained on Control Sieve
0	100
500	91
1000	72
1500	51
2000	32
2500	16
3000	7
3500	2
4000	0

The area of a trapezoid is determined by multiplying the average height by the base. The area of trapezoid 1 is calculated as follows:

$$\text{Average height} = (100\% + 91\%) \text{ divided by } 2 = 95.5\% \quad (\text{Eq. 1})$$

where:

the base = 500 cycles

Area = 95.5% x 500 cycles = 47 750% cycles

The calculations of areas of all the trapezoids are shown in Table 2.

TABLE 2—CALCULATION OF THE AREA UNDER THE BREAKDOWN CURVE AS THE SUM OF THE AREAS OF TRAPEZOIDS INSCRIBED UNDER THE BREAKDOWN CURVE

Trapezoid No.	1	2	3	4	5	6	7	8
Height 1, %	100	91	72	51	32	16	7	2
Height 2, %	91	72	51	32	16	7	2	0
Avg. Height, %	95.5	81.5	61.5	41.5	24	11.5	4.5	1
Base, cycles	500	500	500	500	500	500	500	500
Area, % cycles	47 750	40 750	30 750	20 750	12 000	5750	2250	500

NOTES

Sum of areas 160 500 % cycles

The average life = 160 500 % impacts divided by 100% =1605 cycles.

5.2 Stabilized Loss Method—A sample of shot is run in a test machine for a given number of cycles. The sample is then screened to remove particles which pass through a control sieve. The control sieve aperture should approximately equal the removal size in the blast operation. New shot is added to replace the amount removed. Repeat the procedure, always running the same number of cycles until the amount discarded (the loss) achieves stabilization. The stabilized loss data can be used to compute the average life of the sample.

NOTE—The loss pattern, when each loss is plotted against test cycles, may go through several peaks and valleys before true stabilization occurs. Initial samples should be tested through sufficient test cycles to insure that the sample loss rate has truly stabilized. Stabilization occurs when three consecutive losses vary by less than 0.50% of the initial charge weight.

5.2.1 EXAMPLE PROCEDURE

- a. Place 50 to 100 g of the shot to be tested into the testing machine.
- b. Run for a given interval, preferably a number of cycles sufficient to break down about 20% of the sample.
- c. Screen the shot from the machine, discarding the portion which passes through the control sieve, weigh the sample, and calculate and record the loss.
- d. Add new shot to restore the sample retained on the control sieve to the initial charge weight.
- e. Repeat the procedure, always running the same interval until the amount discarded (the loss) achieves stabilization.
- f. The stabilized loss rate equals the average of the last three values obtained, divided by the cycles intervals used.

5.2.1.1 Example

- a. Initial Charge—100 g of S660 shot
- b. Control Sieve Opening—600 μm
- c. Test Intervals—500 cycles

5.2.1.2 Breakdown Cycles—(See Table 3.)

TABLE 3—BREAKDOWN CYCLES

Cumulative Cycles	Grams Lost
500	9.0
1000	19.8
1500	24.5
2000	26.9
2500	28.9
3000	27.1
3500	27.2
4000	26.9

$$\text{Stabilized loss} = (27.1 \text{ g} + 27.2 + 26.9 \text{ g})/3 = 27.06 \text{ g} \quad (\text{Eq. 2})$$

where:

$$\text{Stabilized loss rate} = 27.06 \text{ g}/500 \text{ cycles} = 0.0541 \text{ g/cycle}$$

$$\text{Final weight equals initial weight minus stabilized loss} = 100 \text{ g} - 27.06 \text{ g} = 72.94 \text{ g}$$

SAE J445 Revised APR96

NOTE—The average life, in this example, is calculated as follows: Average life equals the average number of grams in machine, divided by the stabilized loss rate, in g/cycle, both at stabilized.

The average number of grams in the machine at stabilization equals the average of the initial weight and final weight:

$$(100 + 72.94) \text{ g, divided by } 2 = 86.47 \text{ g}$$

$$\text{Average life} = (86.47 \text{ g}) / (0.0541 \text{ g/cycles}) = 1599 \text{ cycles}$$

5.3 100% Replacement Method—A sample of shot is run in a test machine for a given number of cycles. The sample is then screened to remove particles which pass through a control sieve. The control sieve aperture should approximately equal the removal size in the blast operation. New shot is added to replace the amount removed. Repeat the procedure until an amount equal to or greater than the initial charge has been added.

5.3.1 EXAMPLE PROCEDURE

- a. Place 50 to 100 g of the shot to be tested into the testing machine.
- b. Run for a given interval, preferably a number of cycles sufficient to break down about 20% of the sample.
- c. Screen the shot from the machine, discarding the portion which passes through the control sieve, weigh the sample, and record the grams (%) retained.
- d. Add new shot to restore the sample retained on the control sieve to the initial charge weight.
- e. Repeat (a) to (d), always running the same interval, until the cumulative % discarded (the loss), is equal to or greater than the initial charge weight.
- f. Determine the number of cycles at which 100% replacement has occurred, by interpolation, using Equation 3:

$$100\% \text{ replacement value (in cycles)} = \text{total cycles} - (\text{interval} / \% \text{ last loss}) (\text{cumulative \% loss} - 100\%) \text{ (Eq. 3)}$$

5.3.1.1 Example—(See Table 4.)

- a. S660—Cast steel shot
- b. Control Sieve Opening—425 μm
- c. Test Intervals—500 cycles

TABLE 4—BREAKDOWN CYCLES

Accumulative Cycles	Individual % Remaining	Individual % Loss	Cumulative % Loss
500	87.7	12.2	12.2
1000	84.0	16.0	28.2
1500	82.4	17.6	45.8
2000	80.9	19.1	64.9
2500	80.5	19.5	84.4
3000	81.0	19.0	103.4

$$100\% \text{ replacement value} = 3000 - (500/19.0) (103.4 - 100\%) = 2911 \text{ cycles}$$

5.4 Transmitted Energy Arc Height Test—The purpose of this test is to evaluate the consistency of the transmission of the kinetic energy of the moving shot particles into useful energy to the work surface. Some shot testing machines are designed to locate a standard test strip in the particle blast stream inside the machine. The use of the standard test strips to monitor shot peening intensities (energy transformation) is discussed in SAE J442, J443, and other references on shot peening. The standard test strip curvature developed when the strip is impacted by the shot being tested can be used as a measure of the energy transmitted to the strip by the shot being tested.

5.4.1 EXAMPLE PROCEDURE

- a. Using a sample splitter, carefully split the operating mix of used shot from the last interval in 5.2, or from 5.3, to obtain a sample of $50.0 \text{ g} \pm 0.1 \text{ g}$.
- b. Place the sample from (a) into the test machine.
- c. Place a standard test strip in the test machine fastened to the test strip holder per SAE J442.
- d. Peen the standard test strip for 40 cycles.

NOTE—40 cycles may not represent standard test strip saturation for all shot sizes. It may be necessary to develop a full saturation curve, per SAE J442, to fully understand the performance of the shot being tested.

- e. Remove the standard test strip and measure the arc height of the strip per SAE J442.
- f. The results indicate transmitted energy for the given exposure time. Compare results with results obtained on previous shipments of production lots of the same material. If the arc height is equal to or greater than that achieved using the reference material, the shot is acceptable. If not, the shot is subject to further testing.

6. Notes

6.1 Marginal Indicia—The change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. An (R) symbol to the left of the document title indicates a complete revision of the report.

PREPARED BY THE SAE SURFACE ENHANCEMENT SUBCOMMITTEE OF THE
SAE FATIGUE, DESIGN, AND EVALUATION COMMITTEE

SAE J445 Revised APR96

Rationale—Not applicable.

Relationship of SAE Standard to ISO Standard—Not applicable.

Application—This SAE Information Report is intended to provide users and producers of metallic shot and grit with general information on methods of mechanically testing metal shot in the laboratory.

Reference Section

SAE J442—Test Strip, Holder, and Gage for Shot Peening

SAE J443—Procedures for Using Standard Shot Peening Test Strip

ASTM B 215—Methods of Sampling Finished Lots of Metal Powders

Developed by the SAE Surface Enhancement Subcommittee

Sponsored by the SAE Fatigue, Design, and Evaluation Committee